


PRODUCT DATASHEET

3dB Hybrid Combiner
(698-3800MHz, 200W, 4.3-10,
IP65, -155dBc)

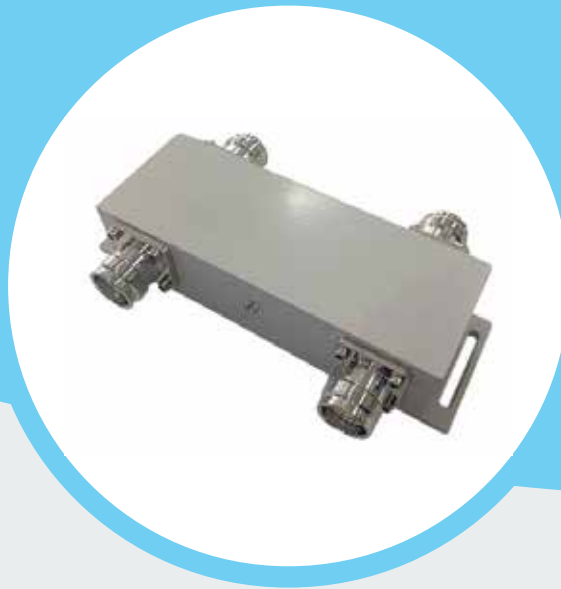

Product Features:

- Wide Frequency Band 698-3800 MHz
- Low Passive Intermodulation (-155 dBc)
- Low VSWR & Insertion Loss
- High Isolation, Outdoor IP65
- Widely used for In-Building Solutions

Technical & Mechanical Specifications:

Model Number:	HM-MHC-738-22-4F-155
Frequency (MHz)	698-3800
Coupling	3.1±0.7
Insertion Loss (dB)	≤0.7
Isolation (dB)	≥23
VSWR	≤1.25
PIM (dBc)	≤-155dBc@2*43dBm (698-2700MHz)
Power (W)	200 (average)
Impedance	50 ohm
Connector	4.3/10-female
Color	Black
Temp (deg)	-30 ~ +65
Application	Indoor or Outdoor, IP65

Mechanical Drawing:

